



卫生级卡箍及管支架系列 Sanitary clamps and pipe holders series

卫生级卡箍及管支架系列
Sanitary clamps and pipe holders series







高洁净流体设备阀门及管道连接部件
解决方案专业制造商
PROFESSIONAL MANUFACTURER OF
SANITARY FLUID VALVE & PIPE FITTING SOLUTIONS


卫生级卡箍及管支架
Sanitary clamps and pipe holders



卡箍螺母 Clamp nut




管支架 Pipe holder



3A No.QL-001

SIZE	A
DN10	12
DN15	18
DN20	22
DN25	28
DN32	34
DN40	40
DN50	52
DN65	70
DN80	85
DN100	104
DN125	129
DN150	154
DN200	204

长枝干管夹 Long branch pipe holder




3A No.QL-002


SIZE	A	B
DN10	12	64
DN15	18	67
DN20	22	69
DN25	28	72
DN32	34	75
DN40	40	78
DN50	52	84
DN65	70	93
DN80	85	100.5
DN100	104	110
DN125	129	140
DN150	154	180
DN200	204	241



DIN/3A/ISO No. QL-003

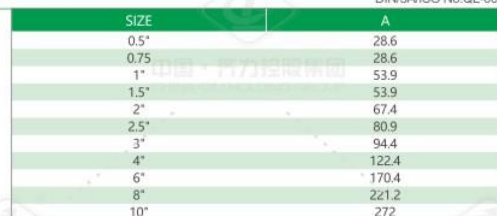


DIN/3A/ISO No.QL-004

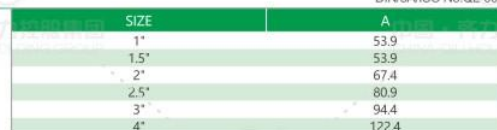


DIN/3A/ISO No.QL-005



DIN/3A/ISO No.QL-006

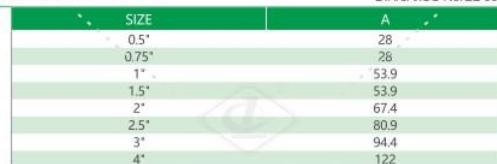

DIN/3A/ISO No. QL-007



DIN/3A/ISO No. QL-008




Physical Property	NBR 丁腈橡胶	EPDM 三元乙丙	Silicon 硅橡胶	Viton 氟橡胶	PTFE 聚四氟乙烯
延伸性	良好	良好	极好	良好	极好
Extensibility	Good	Good	Good	Good	Excellent
电气特性	不足	极好	极好	良好	极好
Electrical characteristics	Deficiency	Excellent	Excellent	Good	Excellent
耐臭氧气	不足	极好	极好	极好	极好
Ozone Resistance	Deficiency	Excellent	Excellent	Excellent	Excellent
耐热	良好	极好	极好	极好	极好
Heat resistance	Good	Excellent	Excellent	Excellent	Excellent
耐寒	良好	良好	极好	良好	尚可
Cold tolerance	Good	Good	Excellent	Good	acceptable
耐蒸汽	不足	良好	不足	不足	极好
Steam Resistance	Deficiency	Good	Deficiency	Deficiency	Excellent
剪切强度	良好	良好	良好	尚可	极好
Shear strength	Good	Good	Good	acceptable	Excellent
耐磨性	良好	良好	良好	良好	极好
Abrasion resistance	Good	Good	Good	Good	Excellent
耐酸性	良好	良好	不足	良好	极好
Acid resistance	Good	Good	Deficiency	Good	Excellent
抗石油溶剂制品	良好	无此特性	不足	极好	极好
White spirit resistance	Good	No such property	Deficiency	Excellent	Excellent
耐明火	不足	不足	不足	良好	极好
Open flame resistance	Deficiency	Deficiency	Deficiency	Good	Excellent
耐植物油	极好	不足	良好	极好	极好
Vegetable oil tolerance	Excellent	Deficiency	Good	Excellent	Excellent
抗氧化	不足	极好	极好	极好	极好
Antioxidation	Deficiency	Excellent	Excellent	Excellent	Excellent
耐压试验	良好	良好	极好	良好	极好
Valve pressure test	Good	Good	Excellent	Good	Excellent
蒸汽消毒	不足	良好	良好	良好	良好
Steam sterilization	Deficiency	Good	Good	Good	Good

The working pressure and temperature of the clamp meet the following requirements

SIZE			13MH4H(单销)		13MH4H(双销)		13MH4S(三片式)		13MHP(高压式)	
3A	DN	ISO 1127	21°C	121°C	21°C	121°C	21°C	121°C	21°C	121°C
1/2"-3/4"			1200	1000						
	DN10-DN20	10.2-21.3	1200	1000						
1"-1 1/2"	DN25-DN40	26.9-42.4	500	250	500	250	600	300	1500	1200
1"	DN50	48.3	450	250	450	250	550	275	1000	800
2 1/1"		60.3	400	200	400	200	450	225	1000	800
3"	DN65	76.1	350	150	350	150	350	160	1000	800
	DN80	88.9	300	150	300	150	300	150	1000	800
4"	DN100	101.6	200	125	200	155	350	150	1000	800
		114.3	200	125	200	125			600	400
5"	DN125	139.7	200	125	200	125			600	400
6"			150	75	150	125			400	300
	DN150	168.3	100	50	150	75				
8"	DN200	8"	100	50	100	75				
10"	DN250	10"	100	50		50				
12"	DN300	12"	80	40						


管支架 Pipe holder



SIZE	ΦA	L
1"	25.4	66
1.5"	38.1	76
2"	50.8	90
2.5"	63.5	105
3"	76.2	120
4"	101.6/104	146

TH-1 No.QL-009




管支架 Pipe holder



SIZE	ΦA	ΦL	SMS	ΦA	L
ISO-21.3	21.3	68	DN25	25	74
ISO-26.9	26.9	74	DN38	38	87
ISO-33.7	33.7	82	DN50	51	105
ISO-42.4	42.4	93	DN53	63.5	117
ISO-48.3	48.3	101	DN76	76.1	133
ISO-60.3	60.3	114	DN104	104	165
ISO-88.9	88.9	149			
ISO-114.3	144.3	177			

TH-2 No.QL-010

管支架 Pipe holder





* DIN	ΦA	H	L	SMS	ΦA	L
DN25	28	46.5	64	DN25	25	61
DN32	34	49.5	64			
DN40	40	52.5	78	DN38	38	76
DN50	52	58.5	90	DN50	51	90
DN65	70	67.5	111	DN63	63.5	106
DN80	85	75	129	DN76	76.1	120
DN100	101.6	83	150	DN100	104	154

TH-3 No.QL-011



管支架 Pipe holder





SIZE	ΦA	L
1/2"	12.7	79
3/4"	19.05	79
1"	25.4	79
1.5"	38.1	95
2"	50.8	117.9
2.5"	63.5	120
3"	76.2	135.1
4"	101.6/104	168.4
6"	152.4	225

TH-4 TypeA No.QL-012



Rubber Grommets

管支架 Pipe holder



SIZE	ΦA	L
1/2"	12.7	79
3/4"	19.05	79
1"	25.4	79
1.5"	38.1	95
2"	50.8	117.9
2.5"	63.5	120
3"	76.2	135.1
4"	101.6/104	168.4
6"	152.4	225

TH-5 TypeA No.QL-013



PP Sleeve